
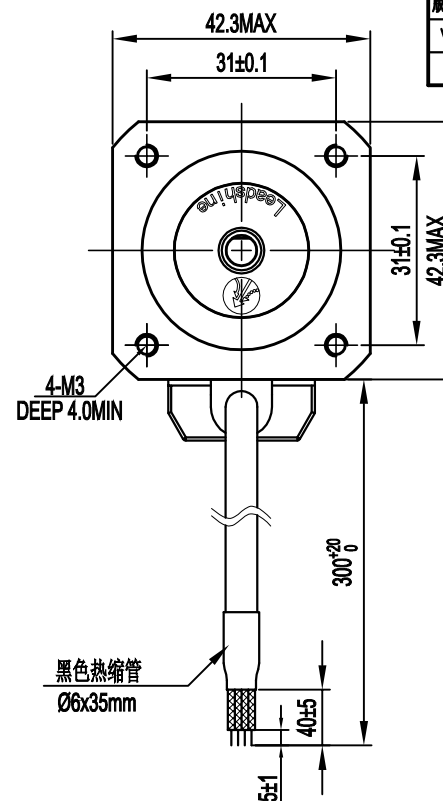

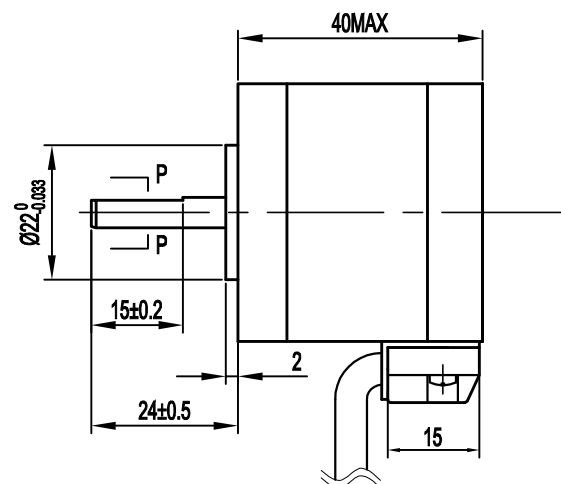


BLK 黑 A
GRN 绿 A
B 红
RED
B 蓝
BLU

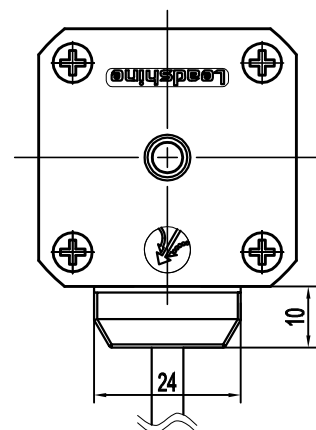

Step angle	1.8°
Step accuracy	1.8±0.9°
Dielectric strength	500VAC 1min
Insulation resistance	100MOhm(500VDC)
Insulation class	B
Temp rise(Max)	80K
Radial play	Max.0.02mm(Load 450g)
Axial play	Max.0.08mm(Load 900g)

Current/phase	1.5 A
Voltage	1.9 V
DC Resistance/phase $\pm 10\%$	2.3 Ω
Inductance/phase $\pm 20\%$	4.3 mH
Holding torque	0.4 N•M
Detent torque	0.068 N•M
Inertia	0.09 kg•cm ²
Weight	0.3 kg

设计 Designed	王洪松	日期 Date	2020.04.16		材料 Material	深圳市雷赛智能控制股份有限公司 SHENZHEN LEADSHINE TECHNOLOGY CO., LTD.				
审核 Checked	黄捷建		2020.04.16			第一角画法 First Angle projection	 		名称 Title	混合式步进电机
批准 Approved	黄捷建		2020.04.16			版本 A/01	比例 Scale	阶段标记 Stage Mark		42CM04D MS20
零件编号 Part No.	LS-MT-01-07A				共 1 套 第 1 套 Sheet 1 of 1				图号 DWG. NO.	LS-42CM04D MS20