

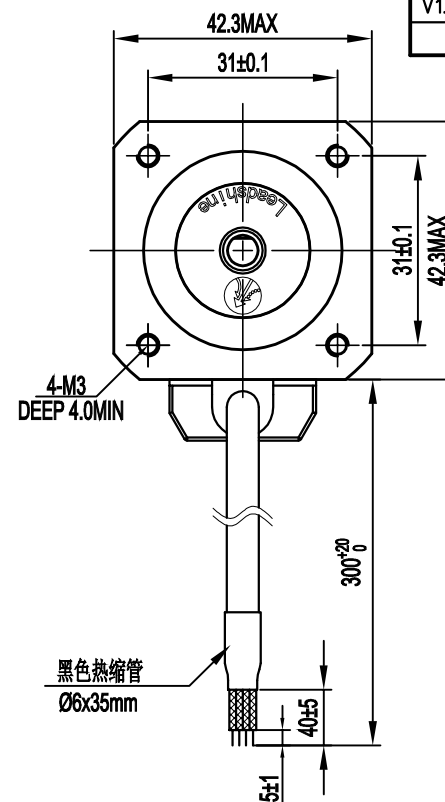

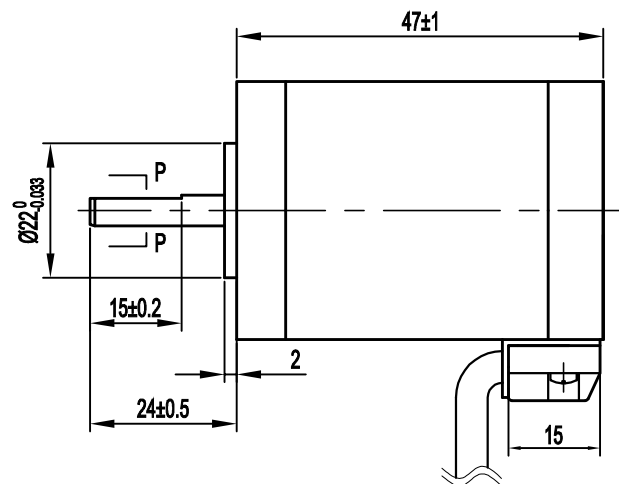


版本 Rev.	日期 Date	变更文件号 ECN NO.	变更内容 Revisions	设计 By
V1.0	20.04.16		初版	王洪松

Dimension: (Unit: mm)

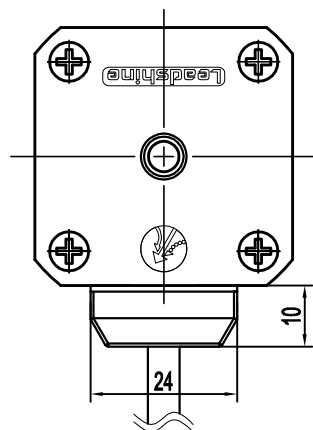

Common Rating

Step angle	1.8°
Position accuracy	1.8±0.9°
Dielectric strength	500VAC 1min
Insulation resistance	100MΩhm(500VDC)
Insulation class	B
Temp rise(Max)	80K
Radial play	Max.0.02mm(Load 450g)
Axial play	Max.0.08mm(Load 900g)

Current/phase	2.5 A
Voltage	1.9 V
DC Resistance/phase ±10%	0.85 Ω
Inductance/phase ±20%	1.6 mH
Holding torque	0.6 N·M
Detent torque	0.068 N·M
Inertia	0.09 kg·cm ²
Weight	0.4 kg

设计 Designed	王洪松	日期 Date	2020.04.16	材料 Material			Ver: A/01			深圳市雷赛智能控制股份有限公司 SHENZHEN LEADSHINE TECHNOLOGY CO., LTD.					
审核 Checked	黄捷建		2020.04.16	第一角画法 First Angle projection			 			名称 Title 混合式步进电机					
批准 Approved	黄捷建		2020.04.16	版本	比例 Scale	阶段标记 Stage Mark			42CM06D MS20						
				A/01											
版本号 Part No.				LS-MT-01-07A				共 1 页 第 1 页 Sheet 1 of 1				图号 DWG. NO.		LS-42CM06D MS20	