



Dimension: (Unit: mm)

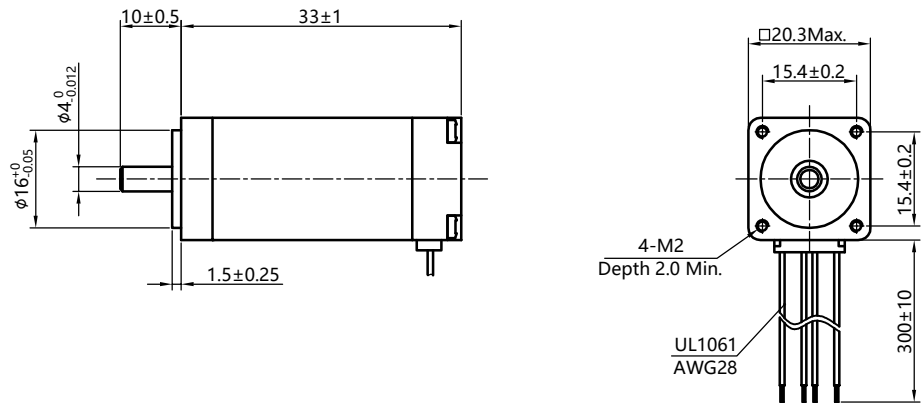

版本 Rev.	日期 Date	变更文件号 ECN NO.	变更内容 Revisions	设计 By
V1.0			初版	王洪松

Motor Connctions:

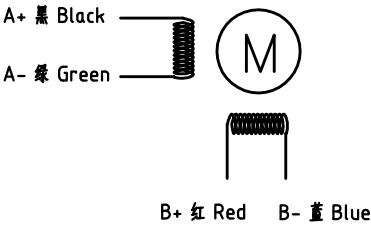

Common Rating

Step angle	1.8°
Position accuracy	1.8±0.09°
Dielectric strength	500VAC 1min
Insulation resistance	100MΩ(500VDC)
Insulation class	B
Temp rise(Max)	80K
Radial play	Max.0.02mm(Load 450g)
Axial play	Max.0.08mm(Load 900g)

Specification:

Current/phase	0.6 A (Peak Current)
Voltage	3.0V
DC Resistance/phase ±10%	5Ω
Inductance/phase ±20%	2.8 mH
Holding torque	0.02 N•M
Inertia	0.03 kg•cm ²
Weight	0.08 kg

设计 Designed	王洪松	日期 Date	2018.01.22	材料 Material			深圳市雷赛智能控制股份有限公司 SHENZHEN LEADSHINE TECHNOLOGY CO., LTD.		
审核 Checked	黄捷建	2018.01.22		第一角画法 First Angle projection				名称 Title	混合式步进电机
批准 Approved	黄捷建	2018.01.22		版本/版次 A/01			比例 Scale		阶段标记 Stage Mark
				A/01			20CM003		
标准编号 Part No. LS-MT-01-07A				共 1 张 第 1 张 Sheet 1 of 1			图号 DWG. NO. LS-20CM003		