Hybrid Stepping Motor

Type:**42**HS03(平台)

Rev: A
Date: 20110414

COMMON RATINGS

Step angle: 1.8°
Positional accuracy: ±5%
Number of Phase: 4
Temperature rise: 80° C MAX
Inertia: gcm²

Dielectric strength: 500VDC
Insulation resistance: 100Mohm(500VDC)
Radial play:
Insulating class: B
Weight: 0.28 kg

SPECIFICATIONS

Holding torque (2 phases on) kg.cm	Rated Current/Phase (Amps DC)	Phase Resistance (ohms) ± 10%	Voltage Current/Phase (V DC)	Phase Inductance (mH) ± 20% (1KHz) Typicat
3.4	1.0	4.6	4.6	4.0

DIMENSIONS unit=mm

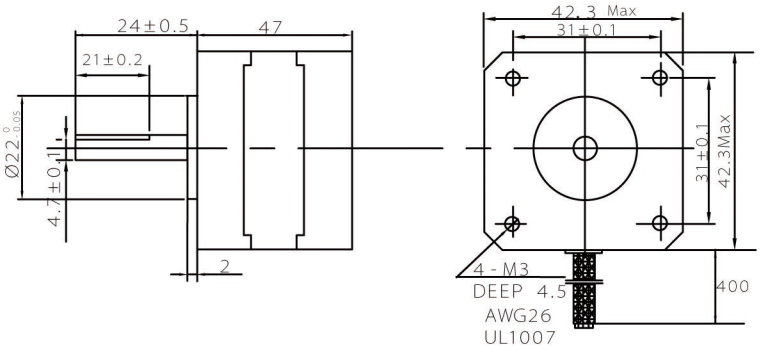

CONNECTIONS

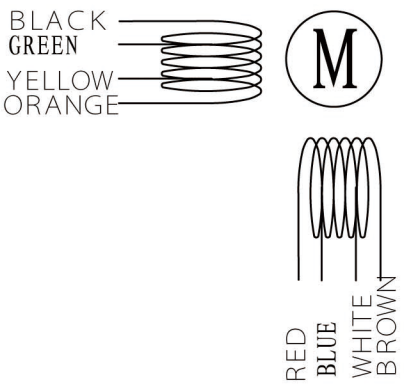

标记	处数	分区	更改文件号	签名	日 期	42HS03(平台)	技术规格书
设计			标准化			阶段标记 / 重量 / 比例	
审核							深圳市雷赛智能控制股份有限公司
工艺			批准			共 张 第 张	