


Dimension: (Unit: mm)

版本 Rev	日期 Date	变更文件号 ECN NO.	变更内容 Revisions	设计 By
V1.0	17.8.1		增 LOGO	王洪林

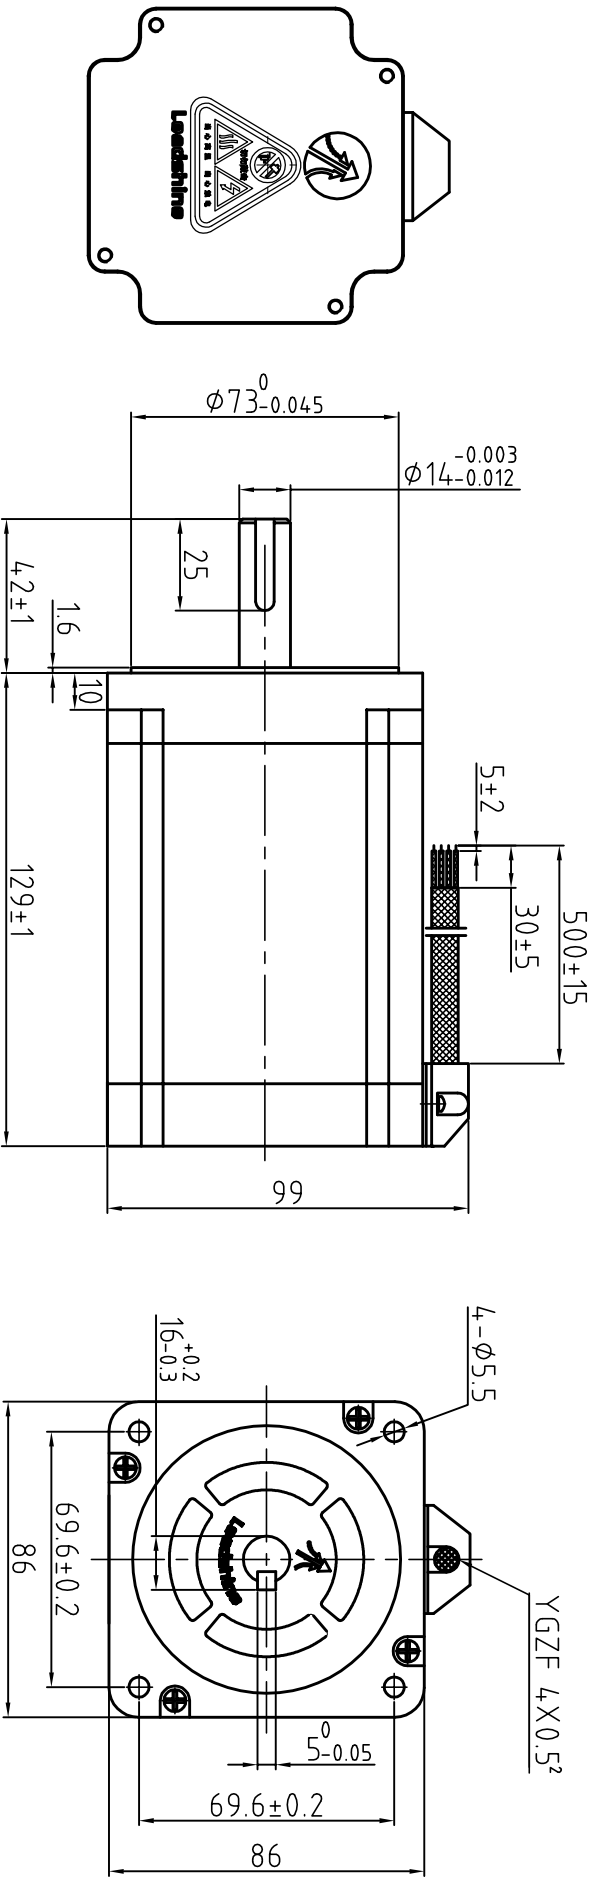


Common Rating

Step angle	1.8°
Position accuracy	18±0.09°
Dielectric strength	1000VAC 1min
Insulation resistance	100MΩhm(500VDC)
Insulation class	B
Temp rise(Max)	80K
Radial play	Max.0.02mm(Load 4.50g)
Axial play	Max.0.08mm(Load 900g)

Specification

Current/phase	6.0 A
Voltage	4.5 V
DC Resistance/phase ±10%	0.75 Ω
Inductance/phase ±20%	5 mH
Holding torque	12 N•M
Inertia	2.94 kg•cm ²
Weight	4.45 kg

Motor Connctions

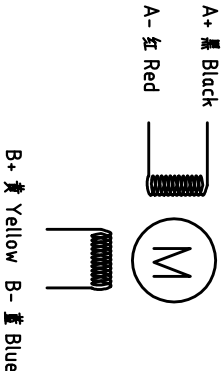

设计 Designed	王洪林	日期 Date	18.7.16	材料 Material	第一角画法 First angle projection	深圳市雷赛智能控制股份有限公司 SHENZHEN LEADSHINE TECHNOLOGY CO., LTD.
审核 Checked	袁雄波		18.7.16	版本/版次 Scale	比例 Scale	混合式步进马达
批准 Approved	袁雄波		18.7.16	A/01	修改记录 Stage Mark	86CM120-0-S4.2
图号 Part No.	LS-MT-01-07A	共 1 套 第 1 套	Sheet 1 of 1	图号 DWG. NO.	LS-86CM120-0-S4.2	