
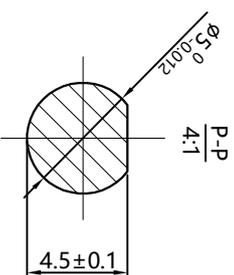
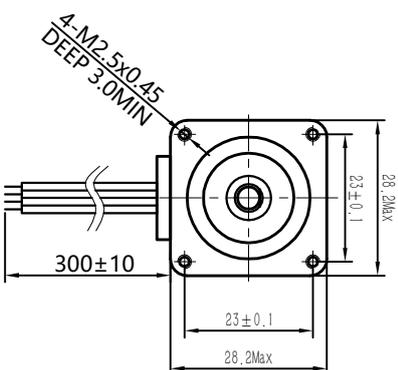
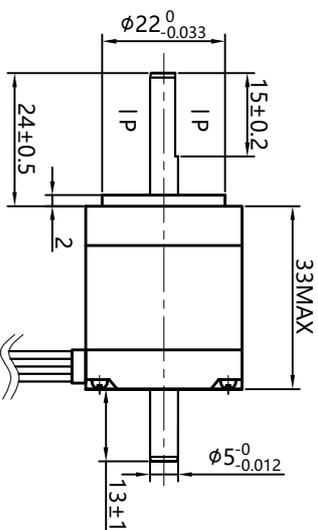


Dimension: (Unit: mm)

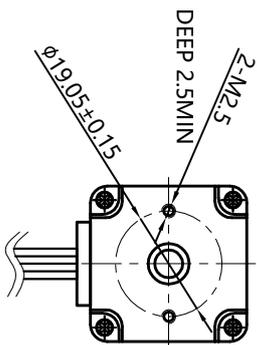


Step angle	1.8°
Position accuracy	1.8±0.09°
Dielectric strength	500VAC 1min
Insulation resistance	100MΩhm(500VDC)
Insulation class	B
Temp rise(Max)	80K
Radial play	Max.0.02mm(load 4.50g)
Axial play	Max.0.08mm(load 900g)

Common Rating

Specification:

Current/phase	0.67 A
Voltage	2.41V
DC Resistance/phase ±10%	3.6 Ω
Inductance/phase ±20%	2.6 mH
Holding torque	0.10 N·M
Inertia	0.09 kg·cm ²
Weight	0.11 kg

Motor Connetions:

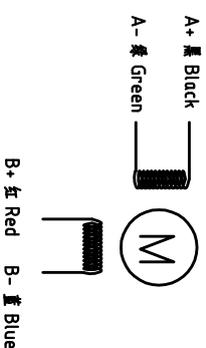

技术要求:
1、未注形位公差按GB/T 1184-K;
2、未注尺寸公差按GB/T 1804-m。
(除非另外指定)

设计 Designed	杨陶	2022-06-21	标准化 Standardization		名称(Name)	开环步进电机
制图 Drawn	杨陶	2022-06-21	审核 Checked	王洪松	型号(Model)	28CM010-SZ MS20
校对 Proofread			批准 Approved	袁桂建	图号(DWG No.)	LS-28CM010-SZ MS20
工艺 Processed			版本/版本 Edition/Serial NO.	2022-06-21	阶段标记(Surge Mark)	
表单编号 Form No.	LS-MT-01-07B		共1页第1页 Page of 1	A/01	比例(Scale)	1:1