



Dimension: (Unit: mm)

版本 Rev.	日期 Date	变更文件号 ECN NO.	变更内容 Revisions	设计 By
V1.0	20.02.12		初版	王洪松

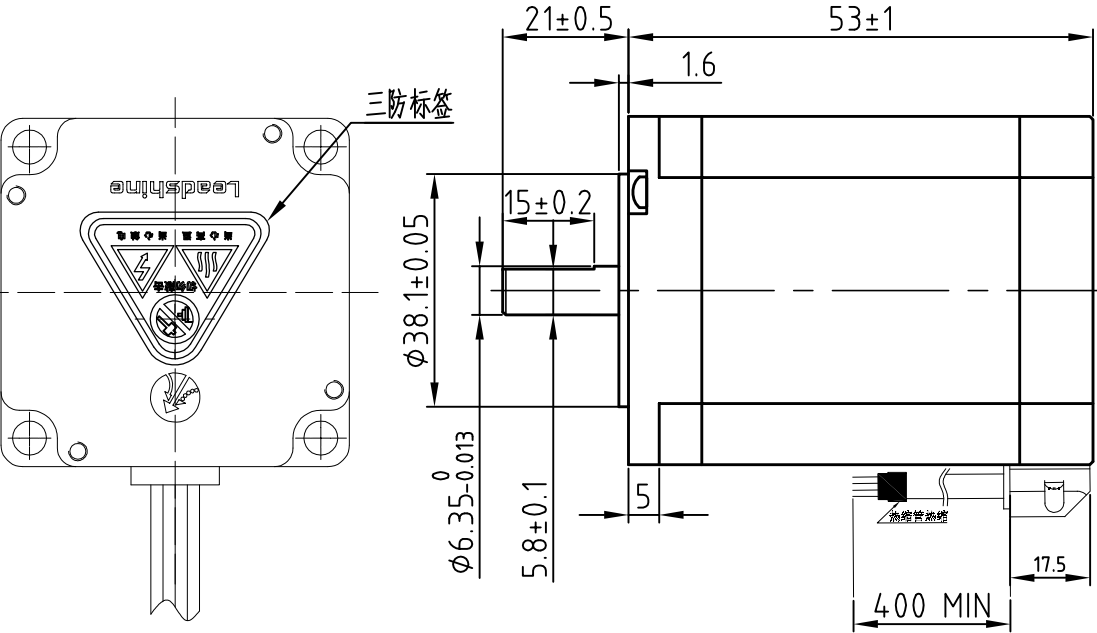

Motor Connctions:

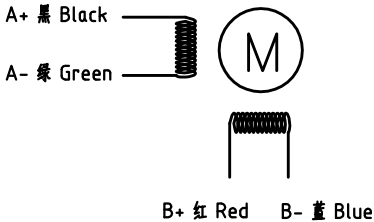

Common Rating

Step angle	1.8°
Position accuracy	1.8±0.9°
Dielectric strength	500VAC 1min
Insulation resistance	100MΩ(500VDC)
Insulation class	B
Temp rise(Max)	80K
Radial play	Max.0.02mm(Load 450g)
Axial play	Max.0.08mm(Load 900g)

Specification:

Current/phase	4.0 A
Voltage	1.9 V
DC Resistance/phase ±10%	0.42 Ω
Inductance/phase ±20%	1.6 mH
Holding torque	1.2 N•M
Detent torque	0.068 N•M
Inertia	0.30 kg•cm ²
Weight	

设计 Designed	王洪松	日期 Date	2020.02.12	材料 Material Ver: A/01			深圳市雷赛智能控制股份有限公司 SHENZHEN LEADSHINE TECHNOLOGY CO., LTD.		
审核 Checked	黄捷建		2020.02.12	第一角画法 First Angle projection			名称 Title 混合式步进电机		
批准 Approved	黄捷建		2020.02.12	重量Weight			比例 Scale		
				阶段标记 Stage Mark			57CM13D MS20		
零件编号 Part No. LS-MT-01-07A				共 1 页 第 1 页 Sheet 1 of 1			图号 DWG. NO. LS-57CM13D MS20		