

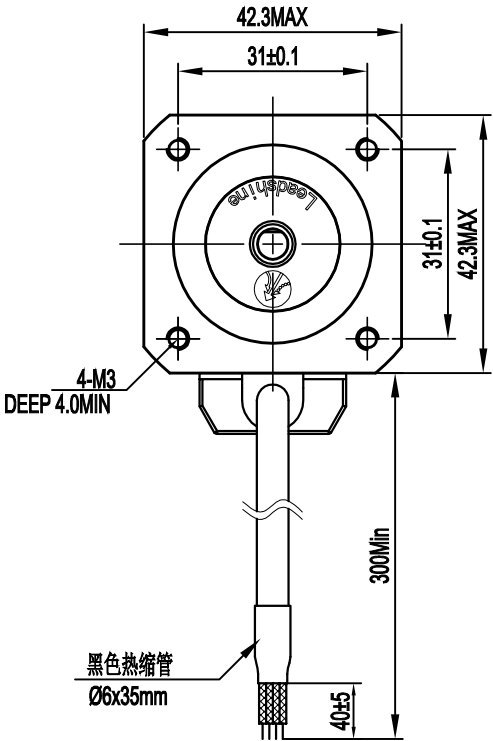


版本 Rev.	日期 Date	变更文件号 ECN NO.	变更内容 Revisions	设计 By
V1.0	20.12.22		初版	王洪松

DIMENSIONGS Unit=mm

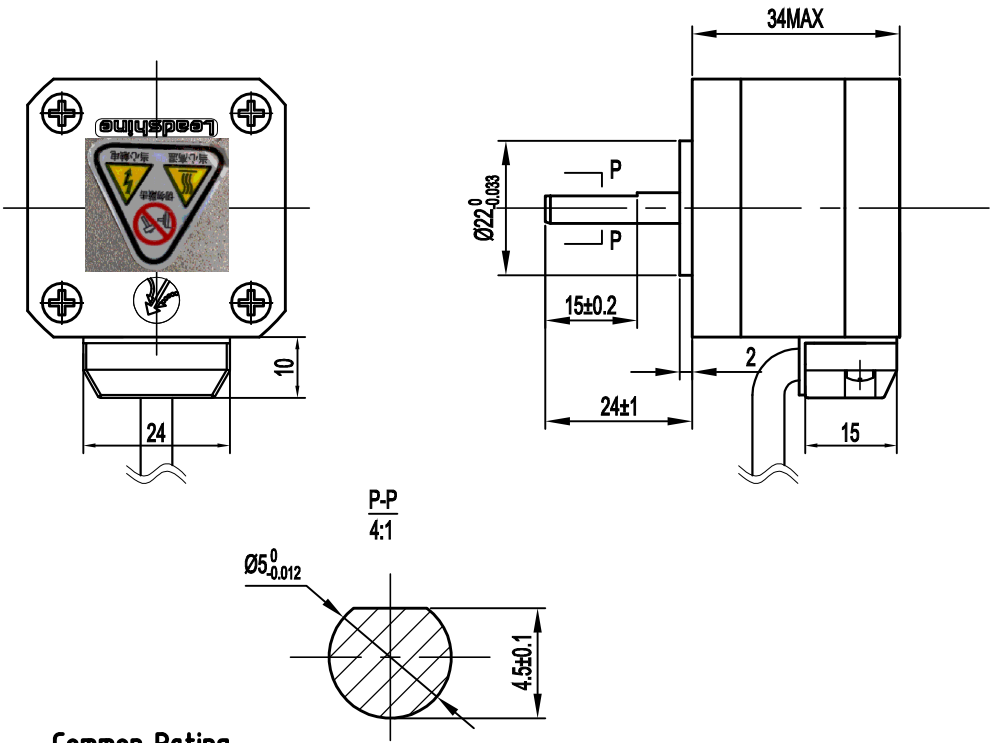

Common Rating

Step angle	1.8°
Position accuracy	1.8±0.09°
Dielectric strength	500VAC 1min
Insulation resistance	100MΩm(500VDC)
Insulation class	B
Temp rise(Max)	80K
Radial play	Max.0.02mm(Load 450g)
Axial play	Max.0.08mm(Load 900g)

Current/phase	1.5 A
Voltage	2.1 V
DC Resistance/phase ±10%	1.4 Ω
Inductance/phase ±20%	1.4 mH
Holding torque	20 N·CM
Detent torque	0.23 N·M
Inertia	0.0035 kg·cm ²
Weight	0.22 kg

设计 Designed	日期 Date	2020.04.16	材料 Material	深圳市雷赛智能控制股份有限公司 SHENZHEN LEADSHINE TECHNOLOGY CO., LTD.
审核 Checked	2020.04.16	第一角画法 First Angle projection	名称 Title	混合式步进电机
批准 Approved	2020.04.16	版本/版次 A/01	比例 Scale	42CM02 MS20
零件编号 Part No.	LS-MT-01-07A	共 1 页 第 1 页 Sheet 1 of 1	图号 DWG. NO.	LS-42CM02 MS20