
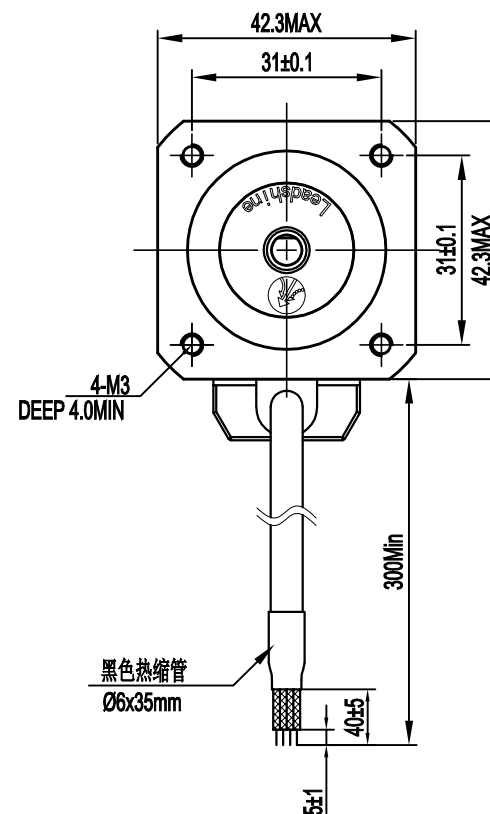

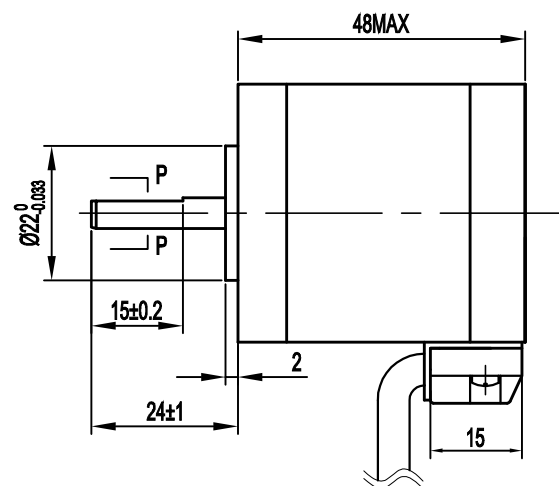


DIMENSIONGS Unit:mm


版本 Rev.	日期 Date	变更文件号 ECN NO.	变更内容 Revisions	设计 By
V1.0	20.04.16		初版	王洪松

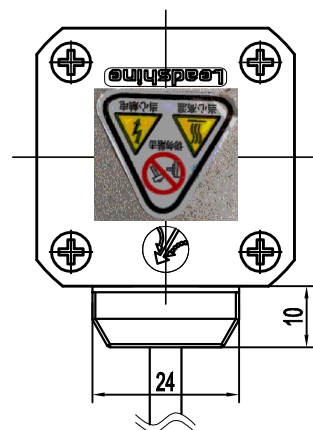

电机接线图

BLK 黑 A

GEN 绿 A



Common Rating

Step angle	1.8°
Position accuracy	1.8±0.09°
Dielectric strength	500VAC 1min
Insulation resistance	100MΩm(500VDC)
Insulation class	B
Temp rise(Max)	80K
Radial play	Max.0.02mm(Load 450g)
Axial play	Max.0.08mm(Load 900g)

Current/phase	2.5 A
Voltage	2.3 V
DC Resistance/phase ±10%	0.9 Ω
Inductance/phase ±20%	1.6 mH
Holding torque	60 N·CM
Inertia	0.072 kg·cm ²
Weight	0.35 kg

设计 Designed	日期 Date	2020.04.16	材料 Material	深圳市雷赛智能控制股份有限公司 SHENZHEN LEADSHINE TECHNOLOGY CO., LTD.
审核 Checked	2020.04.16		第一角画法 First Angle projection	名称 Title
批准 Approved	2020.04.16		版本/版次 A/01	混合式步进电机
图号 DWG. NO.	LS-MT-01-07A	共 1 张 第 1 张 Sheet 1 of 1	比例 Scale	42CM06 MS20
图号 DWG. NO.	LS-42CM06 MS20			