

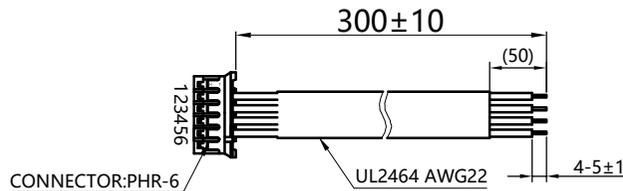
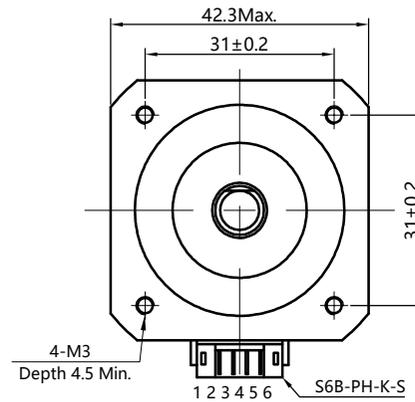


标记Mark	次数No.	更改文件号File change No.	更改内容Content changed	签名Signature	日期Date

Dimension: (Unit: mm)

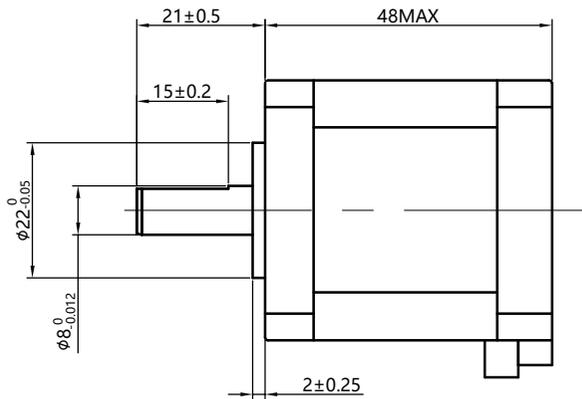

Motor Connctions:



连接器针位/引线颜色

Pin No.vs.Lead wire color

PHR-6 针位Pin No.	颜色 Color
1	N.C
2	黑/BLK
3	红/RED
4	绿/GRN
5	蓝/BLU
6	N.C

Common Rating

Step angle	1.8°
Position accuracy	1.8±0.09°
Dielectric strength	500VAC 1min
Insulation resistance	100MΩ(500VDC)
Insulation class	B
Temp rise(Max)	80K
Radial play	Max.0.02mm(Load 450g)
Axial play	Max.0.08mm(Load 900g)

Specification:

Current/phase	2.0 A
Voltage	2.3 V
DC Resistance/phase ±10%	1.2 Ω
Inductance/phase ±20%	2.0 mH
Holding torque	0.6 N·M
Inertia	0.072 kg·cm <sup>2</sup>
Weight	0.35 kg

技术要求:  
1、未注形位公差按GB/T 1184-K;  
2、未注尺寸公差按GB/T 1804-m。  
(除非另外指定)

设计 Designed	杨陶	2022-01-12	标准化 Standardized		材料(Material):	名称(Title)	开环步进电机	
制图 Drawn	杨陶	2022-01-12				型号(Model)	42CM06-0-18 MS20	
校对 Proofread			审核 Checked	王洪松	2022-01-12	重量(Weight)/g:	图号(DWG No.)	LS-42CM06-0-18 MS20
工艺 Processed			批准 Approved	袁建建	2022-01-12	阶段标记(Stage Mark)	料号(Part No.)	
表单编号 Form No.	LS-MT-01-07B		版本/版次 Edition/Serial NO.	A/01		共1页第1页 Page 1 of 1	比例(Scale)	1:1

