
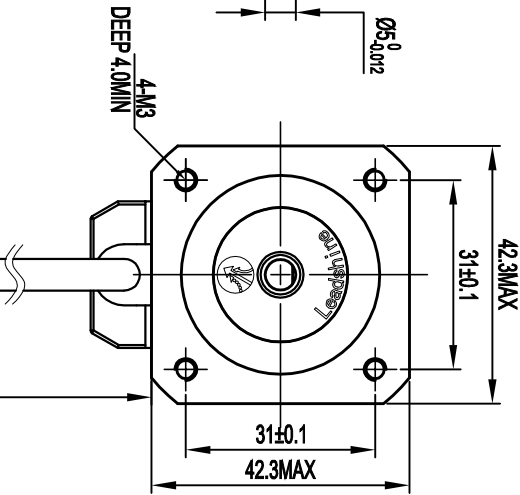


DIMENSIONS Unit:mm

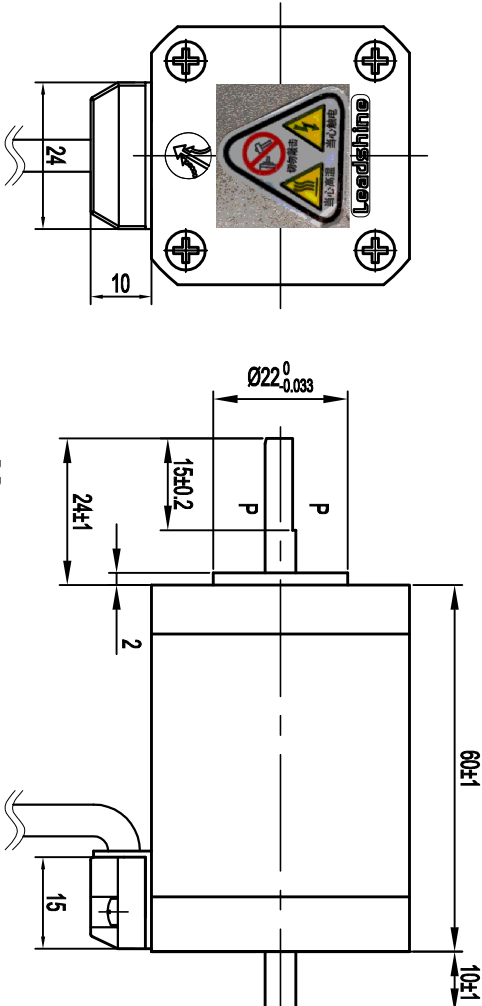

电机接线图


BLK 黑 A

GEN 绿 A

RED 红 B
BLU 蓝 B

Common Rating

Step angle	1.8°
Position accuracy	1.8±0.09°
Dielectric strength	500VAC 1min
Insulation resistance	100MΩhm(500VDC)
Insulation class	B
Temp rise(Max)	80K
Radial play	Max:0.02mm(Load 4.50g)
Axial play	Max:0.08mm(Load 900g)



Current/phase	2.5 A
Voltage	2.5 V
DC Resistance/phase ±10%	1 Ω
Inductance/phase ±20%	2.4 mH
Holding torque	80 N·CM
Inertia	0.11 kg·cm ²
Weight	0.5 kg

设计 日期 2020.04.16	材料 塑料	深圳市雷赛智能控制股份有限公司 SHENZHEN LEADSHINE TECHNOLOGY CO., LTD.
审核 日期 2020.04.16	第一角画法 First Angle projection	混合式步进电机
批准 日期 2020.04.16	版本/版次 A/01	42CM08-SZ MS20
零件图号 Part No.	LS-MT-01-07A	图号 DWG. NO.
共 1 页 第 1 页	Sheet 1 of 1	LS-42CM08-SZ MS20