

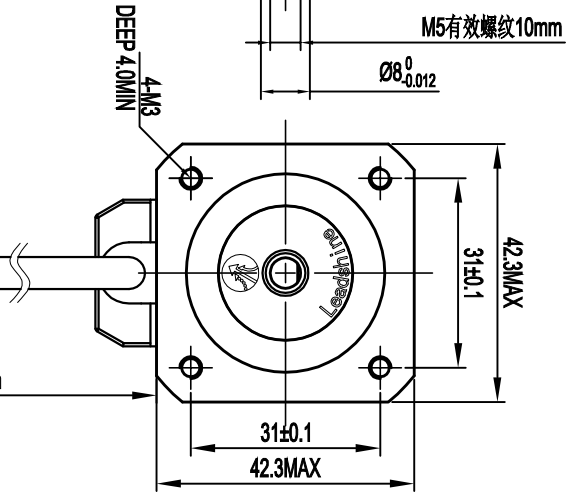


DIMENSIONS Unit:mm

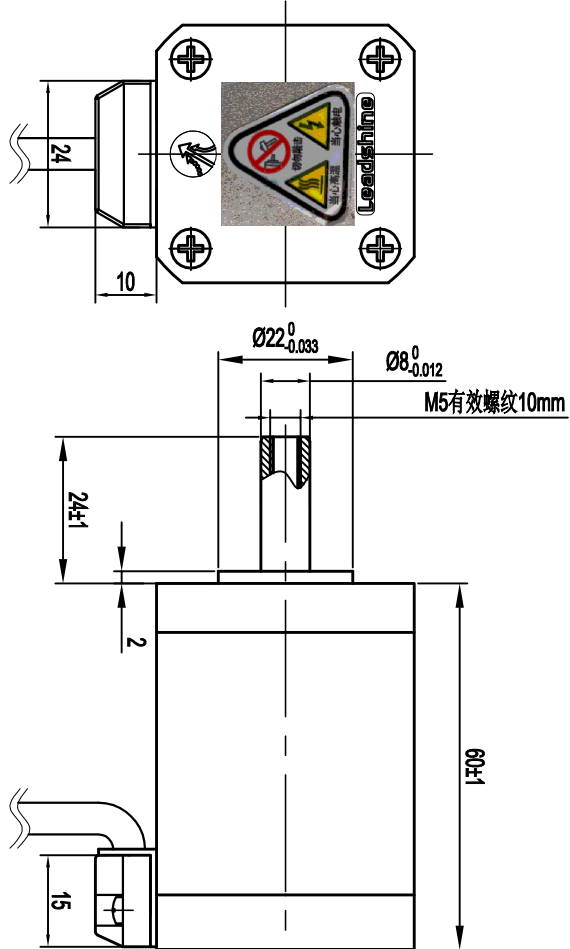

Common Rating

Step angle	1.8°
Position accuracy	1.8±0.09°
Dielectric strength	500VAC 1min
Insulation resistance	100MΩhm(500VDC)
Insulation class	B
Temp rise(Max)	80K
Radial play	Max:0.02mm(Load 4.50g)
Axial play	Max:0.08mm(Load 900g)

Current/phase	2.5 A
Voltage	2.5 V
DC Resistance/phase ±10%	1 Ω
Inductance/phase ±20%	2.4 mH
Holding torque	80 N·CM
Inertia	0.11 kg·cm ²
Weight	0.5 kg

设计	日期	材料	深圳市雷赛智能控制股份有限公司
审核	2020.04.16	第一角画法	SHEENZHEN LEADSHINE TECHNOLOGY CO., LTD.
批准	2020.04.16	版本/版次	混合式步进电机
批准	2020.04.16	比例 Scale	42CM08-SZ-ZK
批准	2020.04.16	图例	
批准	2020.04.16	图号	LS-MT-01-07A
批准	2020.04.16	图号	LS-42CM08-SZ-ZK