

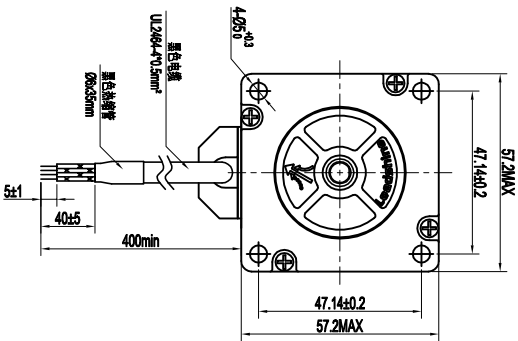
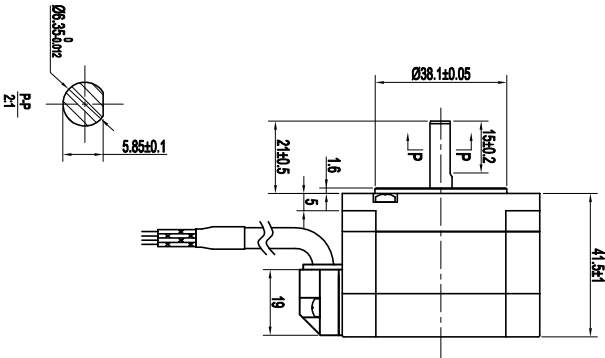


DIMENSIONS Unit:mm

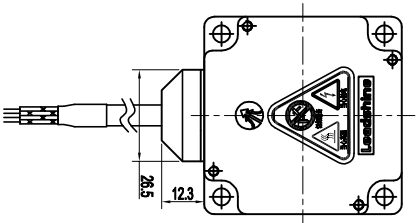

□ 电动机接线图



Common Rating

Step angle	1.8°
Position accuracy	1.8±0.09°
Dielectric strength	500VAC 1min
Insulation resistance	100MΩhm(500VDC)
Insulation class	B
Temp rise(Max)	80K
Radial play	Max.0.02mm(load 4.50g)
Axial play	Max.0.08mm(load 900g)

Current/phase	3.0 A
Voltage	2.1 V
DC Resistance/phase ±10%	0.7 Ω
Inductance/phase ±20%	1.4 mH
Holding torque	0.6 N·M
Detent torque	0.026 N·M
Inertia	0.12 kg·cm ²
Weight	0.45 kg

设计 Designed	日期 Date	材料 Material	深圳市雷赛智能控制股份有限公司 SHENZHEN LEADSHINE TECHNOLOGY CO., LTD.
审核 Checked	2021.04.28	第一套图 First stage projection	混合式步进电机
批准 Approved	2021.04.28	版本/版次 Scale	57CM06 MS30
零件号 Part No.	LS-MT-01-07A	共 1 套 第 1 套 Sheet 1 of 1	图号 DWG. NO. LS-57CM06 MS30