



DIMENSIONGS Unit=mm

版本 Rev.	日期 Date	变更文件号 ECN NO.	变更内容 Revisions	设计 By
V1.0	21.04.19		初版	王洪松
V2.0	21.04.29		轴径变更为6.35	王洪松

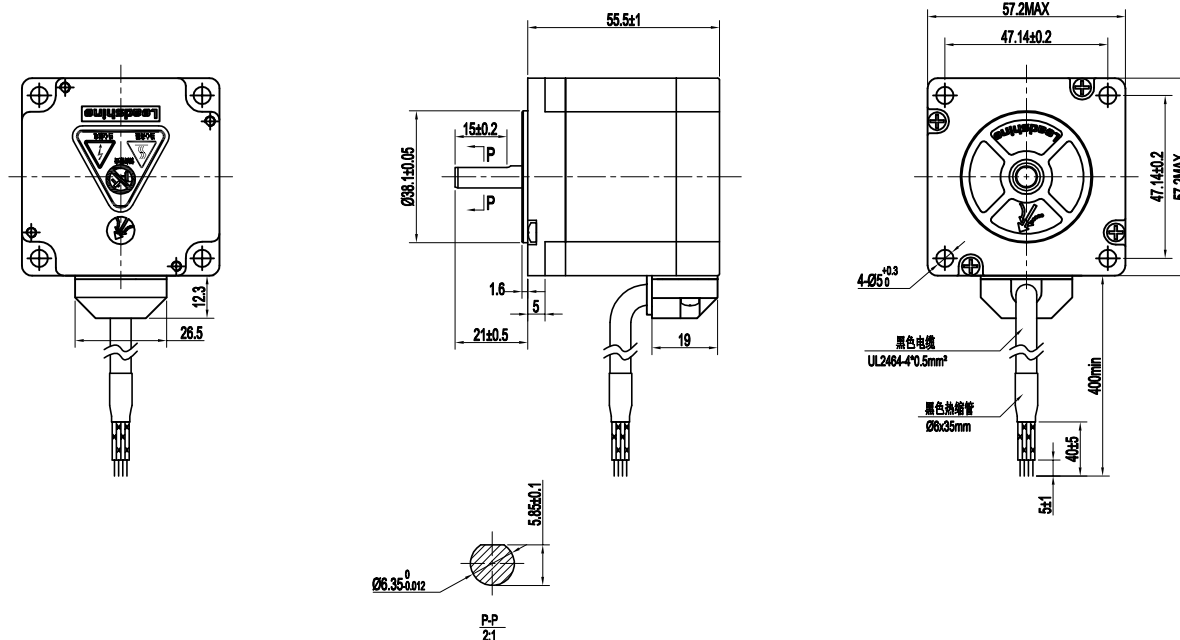

电机接线图



Common Rating

Step angle	1.8°
Position accuracy	1.8±0.09°
Dielectric strength	500VAC 1min
Insulation resistance	100MΩhm(500VDC)
Insulation class	B
Temp rise(Max)	80K
Radial play	Max.0.02mm(Load 450g)
Axial play	Max.0.08mm(Load 900g)

Current/phase	4.0 A
Voltage	1.68 V
DC Resistance/phase ±10%	0.42 Ω
Inductance/phase ±20%	1.6 mH
Holding torque	1.3 N·M
Detent torque	0.04 N·M
Inertia	0.4 kg·cm²
Weight	0.72 kg

设计 Designed	何晓3	日期 Date	2021.04.29	材料 Material			深圳市雷赛智能控制股份有限公司 SHENZHEN LEADSHINE TECHNOLOGY CO., LTD.		
审核 Checked	黄捷建		2021.04.29	第一角画法 First Angle projection			名称 Title	混合式步进电机	
批准 Approved	黄捷建		2021.04.29	版本/版次 A/02	比例 Scale	阶段标记 Stage Mark		57CM13 MS30	
表单编号 Part No.	LS-MT-01-07A			共 1 页 第 1 页 Sheet 1 of 1			图号 DWG. NO.	LS-57CM13 MS30	