



DIMENSIONS Unit=mm

版本 Rev.	日期 Date	变更文件号 ECN NO.	变更内容 Revisions	设计 By
V1.0	21.04.28		初版	王洪

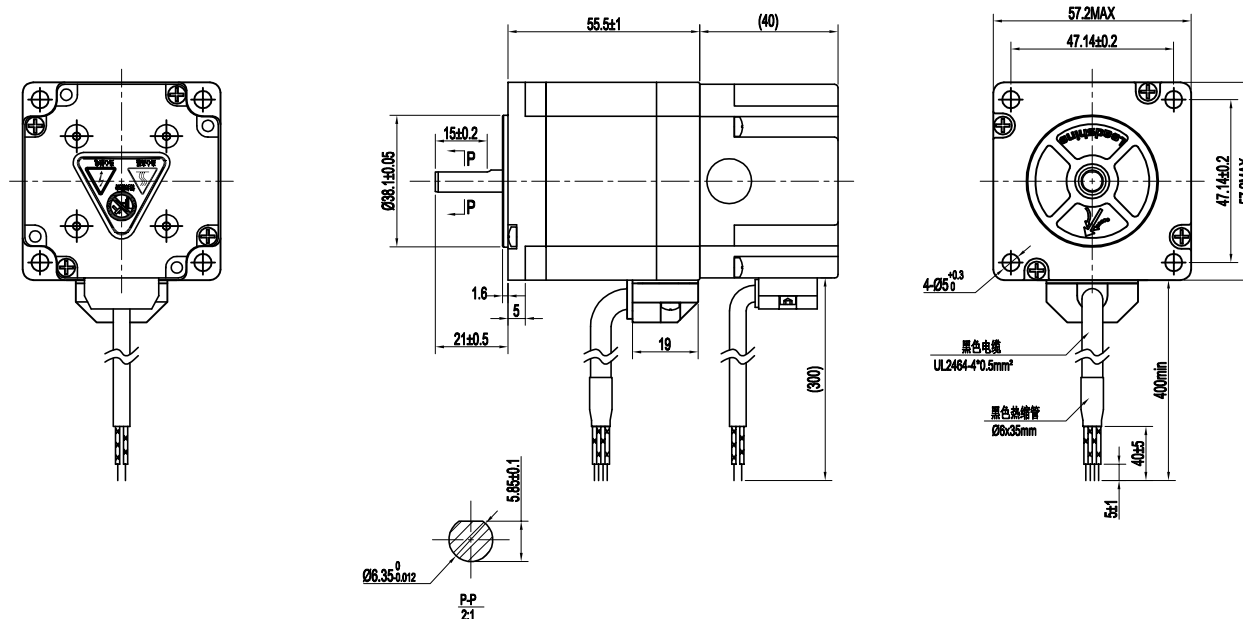

□ 电机接线图



永磁式断电刹车参数	
接线图	
电压	DC24V
制动力	2N.m

Common Rating

Step angle	1.8°
Position accuracy	1.8±0.09°
Dielectric strength	500VAC 1min
Insulation resistance	100MOhm(500VDC)
Insulation class	B
Temp rise(Max)	80K
Radial play	Max.0.02mm(Load 450g)
Axial play	Max.0.08mm(Load 900g)

Current/phase	4.0 A
Voltage	1.68 V
DC Resistance/phase $\pm 10\%$	0.42 Ω
Inductance/phase $\pm 20\%$	1.6 mH
Holding torque	1.3 N•M
Detent torque	0.068 N•M
Inertia	0.48 kg•cm ²
Weight	1.14 kg

设计 Designed	付强	日期 Date	2021.04.28		材料 Material			深圳市雷赛智能控制股份有限公司 SHENZHEN LEADSHINE TECHNOLOGY CO., LTD.			
审核 Checked	黄捷建		2021.04.28		第一角画法 First Angle projection				名称 Title	混合式步进电机	
批准 Approved	黄捷建		2021.04.28		原图/原次 A/01	比例 Scale	阶段标记 Stage Mark			57CM13-BZ MS30	
按单编号 Part No.	LS-MT-01-07A				共 1 套 第 1 套 Sheet 1 of 1			图号 DWG. NO. LS-57CM13-BZ MS30			