





标记Mark	处数No.	更改文件号File change No.	更改内容Content changed	签名Signature	日期Date
	1		电流修正为5A	杨陶	21.10.20


Dimension: (Unit: mm)

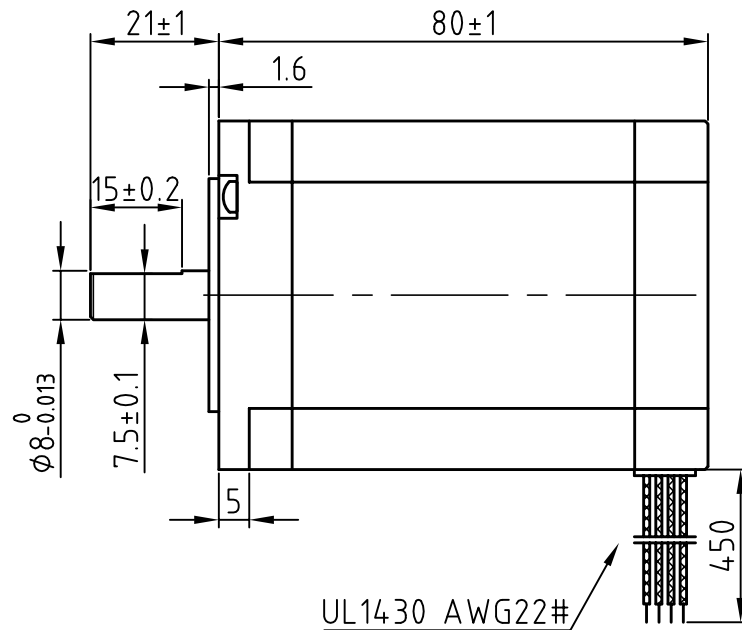

UL1430 AWG22#

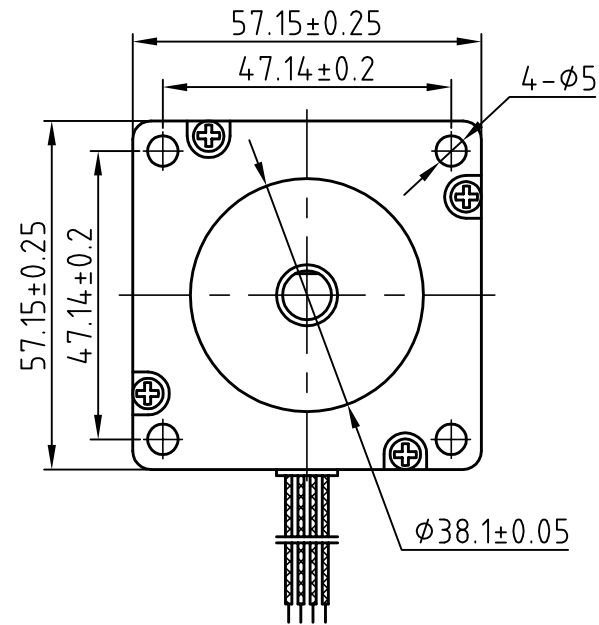

Motor Connctions:

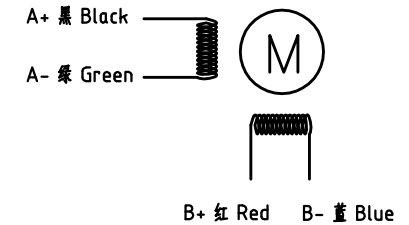

Common Rating

Step angle	1.8°
Position accuracy	1.8±0.09°
Dielectric strength	500VAC 1min
Insulation resistance	100MΩm(500VDC)
Insulation class	B
Temp rise(Max)	80K
Radial play	Max.0.02mm(Load 450g)
Axial play	Max.0.08mm(Load 900g)

Specification:

Current/phase	5 A
Voltage	1.6 V
DC Resistance/phase ±0.1Ω	0.34 Ω
Inductance/phase ±20%	1.74 mH
Holding torque	2.3 N·M
Inertia	0.48 kg·cm ²
Weight	1.1 kg

技术要求:

- 1、未注形位公差按GB/T 1184-K;
 - 2、未注尺寸公差按GB/T 1804-m。
- (除非另外指定)

设计 Designed	杨陶	2021-10-20	标准化 Standardization			材料(Material):	名称(Title)	开环步进电机
制图 Drawn	杨陶	2021-10-20					型号(Model)	57CM22X
校对 Proofread			审核 Checked	王洪松	2021-10-20	重量(Weight)/g:	图号(DWG No.)	LS-57CM22X
工艺 Processed			批准 Approved	袁建建	2021-10-20	阶段标记(Stage Mark)	料号(Part No.)	
表单编号 Form No.	LS-MT-01-07B		版本/版次 Edition/Serial NO.	A/02	共1页第1页 Page 1 of 1	比例(Scale)	 雷赛智能 Leadshine	