



版本 Rev.	日期 Date	变更文件号 ECN NO.	变更内容 Revisions	设计 By
V1.0	21.04.28		初版	王洪松

DIMENSIONGS Unit=mm

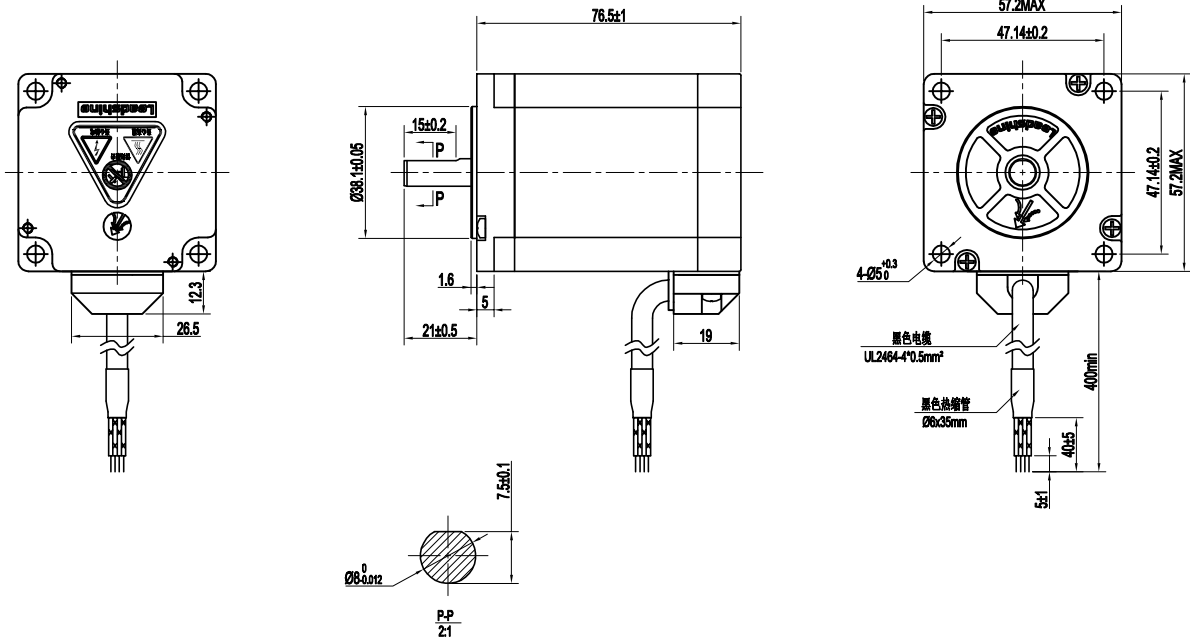

Common Rating

Step angle	1.8°
Position accuracy	1.8±0.09°
Dielectric strength	500VAC 1min
Insulation resistance	100MΩ(500VDC)
Insulation class	B
Temp rise(Max)	80K
Radial play	Max.0.02mm(Load 450g)
Axial play	Max.0.08mm(Load 900g)

Current/phase	5.0 A
Voltage	1.9 V
DC Resistance/phase ±10%	0.38 Ω
Inductance/phase ±20%	1.75 mH
Holding torque	2.3 N•M
Detent torque	0.068 N•M
Inertia	0.48 kg•cm ²
Weight	1.1 kg

设计 Designed	日期 Date	2021.04.28	材料 Material	深圳市雷赛智能控制股份有限公司 SHENZHEN LEADSHINE TECHNOLOGY CO., LTD.
审核 Checked	2021.04.28		第一角画法 First Angle projection	名称 Title
批准 Approved	2021.04.28		版本/版次 A/01	混合式步进电机
图号 DWG. NO.	LS-MT-01-07A	共 1 张 第 1 张 Sheet 1 of 1	图号 DWG. NO.	57CM23 MS30