



Dimension: (Unit: mm)

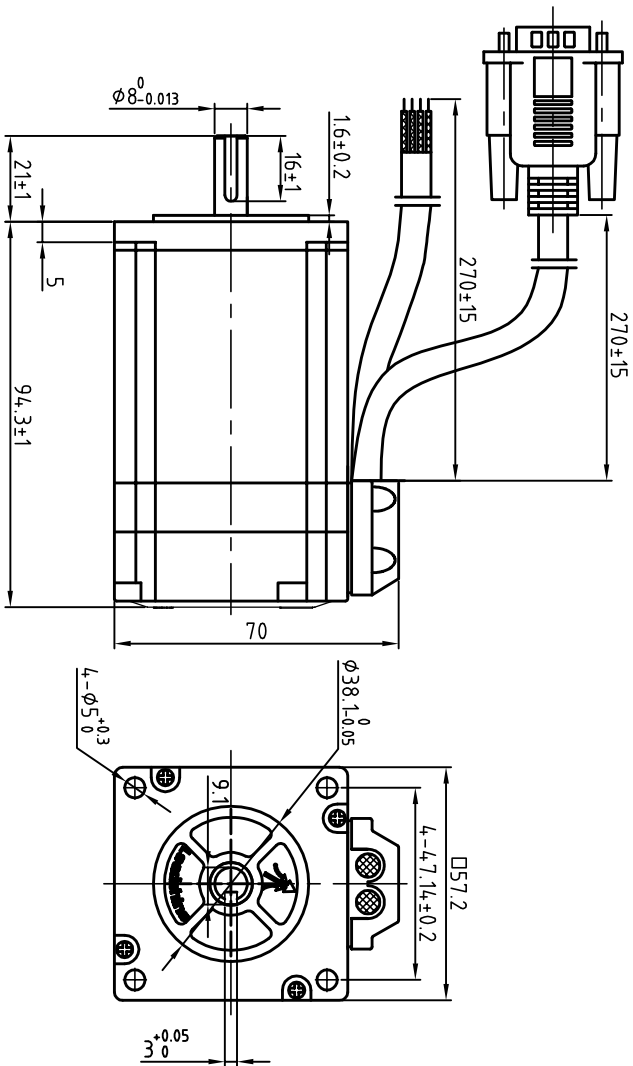


Motor Connctions:



B+ 黄 Yellow B- 绿 Green

Encoder Signals



PIN	1	2	3	11	12	13
颜色	黑	红	白	黄	绿	蓝
定义	A+	VCC	GND	B+	B-	A-

Common Rating

Step angle	1.8°
Position accuracy	1.8±0.09°
Dielectric strength	500VAC 1min
Insulation resistance	100MOMin(500VDC)
Insulation class	B
Temp rise(Max)	80K
Radial play	Max:0.02mm(load 4.50g)
Axial play	Max:0.08mm(load 900g)

Specification:

Current/phase	5.0 A
Voltage	1.9 V
DC Resistance/phase ±10%	0.38 Ω
Inductance/phase ±20%	1.75mH
Holding torque	2.3 N·M
Inertia	0.48 kg·cm ²
Weight	
Encoder resolution	1000 cpr

技术要求:
1、未注形位公差按GB/T 1184-K;
2、未注尺寸公差按GB/T 1804-m。
(除非另外指定)

设计 Designed	杨陶	2021-09-11	标准化 Standardization		名称Title	闭环步进电机
制图 Drawn	杨陶	2021-09-11			型号Model	570ME23-K MS31
校对 Proofread			审核 Checked		重量Weight/g:	
工艺 Processed			批准 Approved		阶段标记Stage Mark	图号DWG No.)
表单编号 Form No.	LS-MT-01-07B		版本/版本 Edition/Serial NO.)	A/01	共1页第1页 Page of 1	料号Part No.)
					比例Scale	1:1
						雷赛智能 Leadshine