

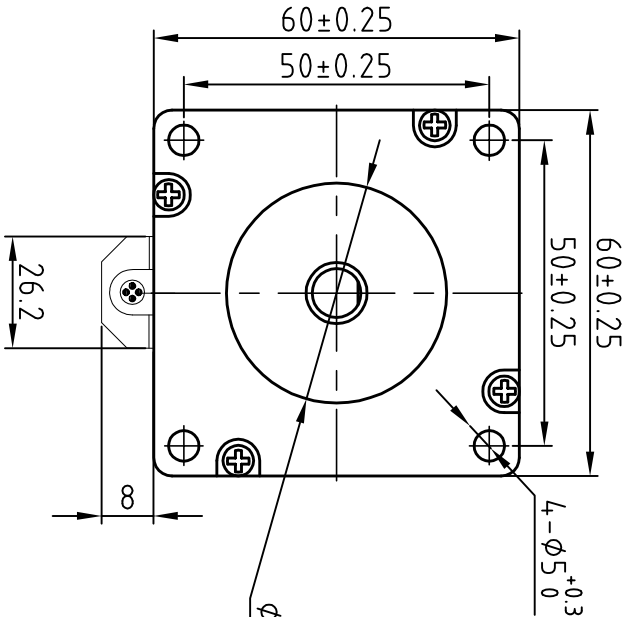


Dimension: (Unit: mm)

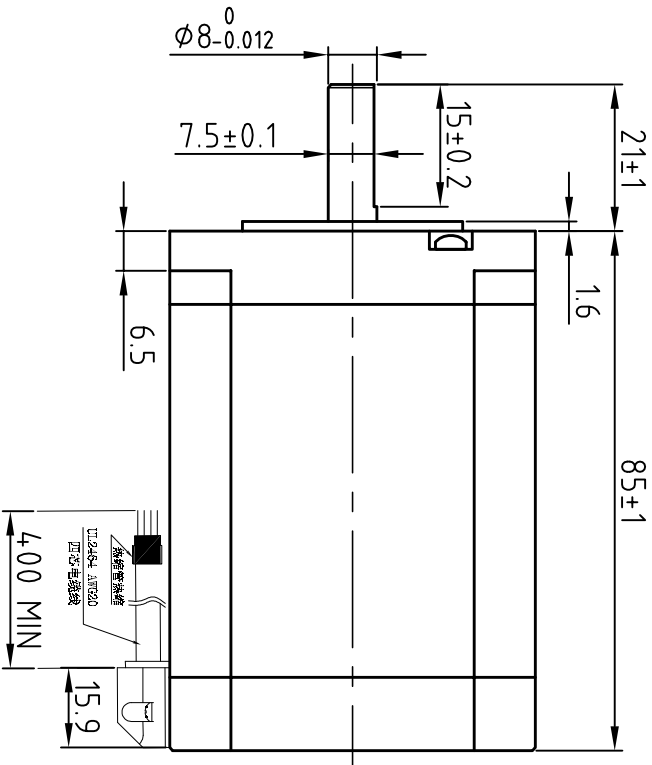

Motor Connetions:

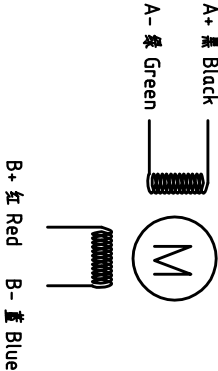

Common Rating

Step angle	1.8°
Position accuracy	1.8±0.09°
Dielectric strength	500VAC 1min
Insulation resistance	100MΩhm(500VDC)
Insulation class	B
Temp rise(Max)	80K
Radial play	Max:0.02mm(Load 4.50g)
Axial play	Max:0.08mm(Load 900g)

Specification:

Current/phase	5.0 A
Voltage	3.3 V
DC Resistance/phase ±10%	0.46Ω
Inductance/phase ±20%	2.0 mH
Holding torque	3.0 N·M
Inertia	0.69 kg·cm ²
Weight	1.3 kg

设计 Designed	王洪松	日期 Date	2021.06.02		材料 Material	深圳市雷赛智能控制股份有限公司 SHENZHEN LEADSHINE TECHNOLOGY CO., LTD.				
审核 Checked	黄捷建	2021.06.02								
批准 Approved	黄捷建	2021.06.02		第一角画法 First Angle projection		混合式步进电机				
料号 Part No.	LS-MT-01-07A			版本/版次 Scale	修改标记 Stage Mark					
				A/01						
图号 DWG. NO.					LS-60CM30X MS20					

版本 Rev	日期 Date	变更文件号 ECN NO.	变更内容 Revisions	设计 By
V1.0	17.05.24		60规格, 3Nm	王洪松