




版本 Rev.	日期 Date	变更文件号 ECN NO.	变更内容 Revisions	设计 By

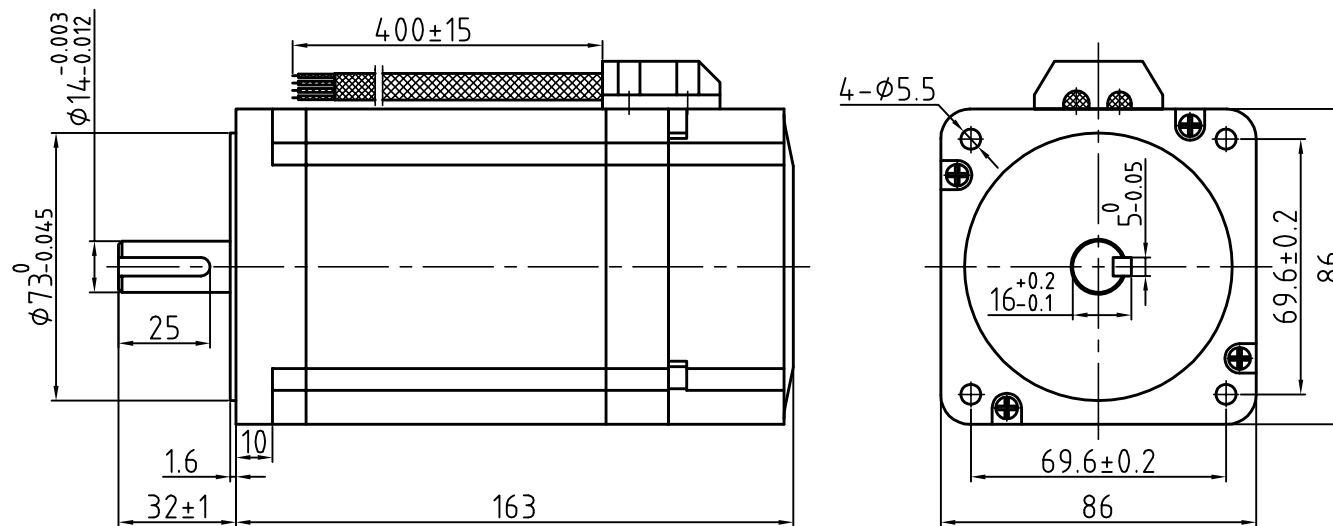

Motor Connctions

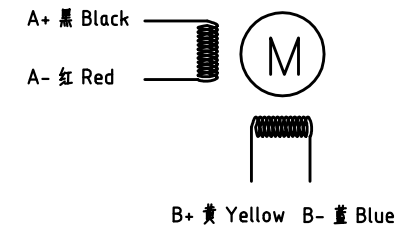

Brake Connctions



Common Rating

Step angle	1.8°
Position accuracy	1.8±0.09°
Dielectric strength	1000VAC 1min
Insulation resistance	100MΩm(500VDC)
Insulation class	B
Temp rise(Max)	80K
Radial play	Max.0.02mm(Load 450g)
Axial play	Max.0.08mm(Load 900g)

Specification

Current/phase	6.0 A
Voltage	3.2 V
DC Resistance/phase ±10%	0.69 Ω
Inductance/phase ±20%	5.3 mH
Holding torque	12 N•M
Inertia	2.8 kg•cm ²
Weight	5.8 kg

Brake Specification

Voltage	24Vdc
Friction torque	4N•M

设计 Designed	王瑞松	日期 Date	19.5.25	材料 Material			深圳市雷赛智能控制股份有限公司 SHENZHEN LEADSHINE TECHNOLOGY CO., LTD.		
审核 Checked	黄维立	19.5.25	第一角画法 First Angle projection					名称 Title	混合式步进电机
批准 Approved	黄维立	19.5.25	版本/版次 A/01	比例 Scale	阶段标记 Stage Mark			86CM120-BZ	
料号 Part No.	LS-MT-01-07A			共 1 张 第 1 张 Sheet 1 of 1			图号 DWG.NO	LS-86CM120-BZ	