
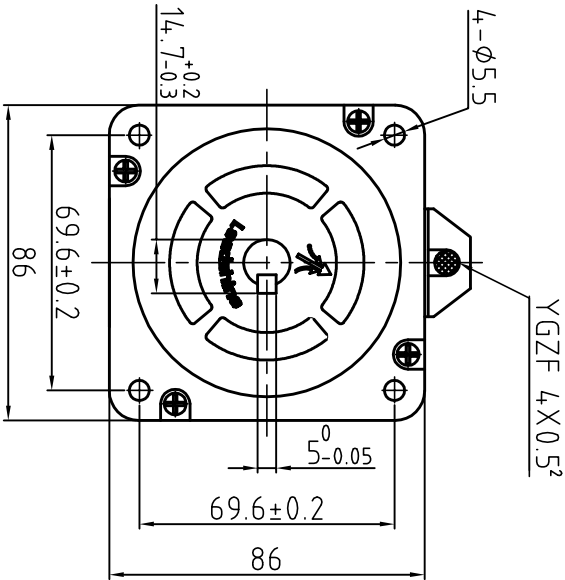
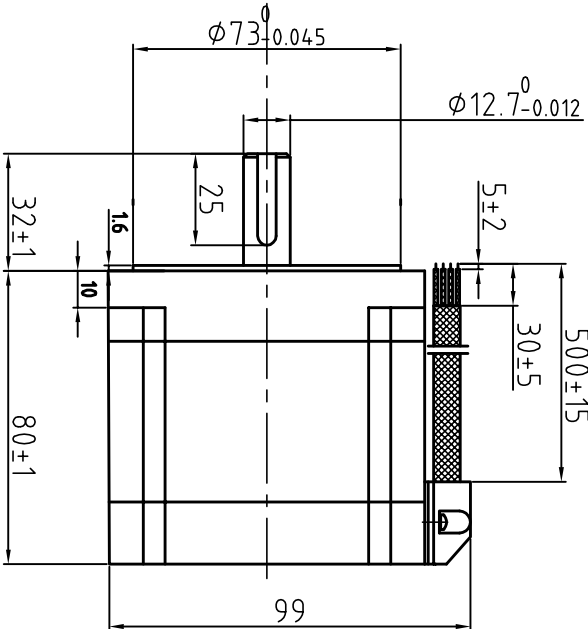


Dimension: (Unit: mm)

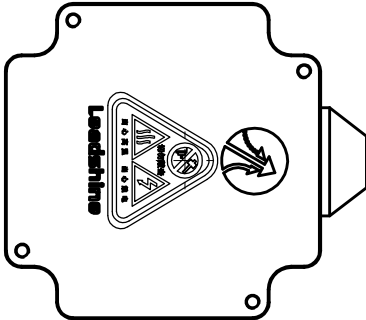


Common Rating

Step angle	1.8°
Position accuracy	18±0.09°
Dielectric strength	500VAC 1min
Insulation resistance	100MΩhm(500VDC)
Insulation class	B
Temp rise(Max)	80K
Radial play	Max.0.02mm(Load 4.50g)
Axial play	Max.0.08mm(Load 900g)

Specification

Current/phase	6.0 A
Voltage	36V
DC Resistance/phase	0.43 Ω
Inductance/phase	2.95 mH
Holding torque	4.6N•M
Inertia	14. kg•cm²
Weight	2.4 kg

Motor Connections

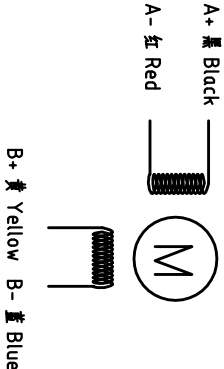

设计 Designed	王瑞如	日期 Date	17.05.19			材料 Material				深圳市雷赛智能控制股份有限公司 SHENZHEN LEADSHINE TECHNOLOGY CO., LTD.		
审核 Checked	黄捷建	17.05.19	第一角画法 First Angle projection			名称 Title		混合式步进马达				
批准 Approved	黄捷建	17.05.19	版本/版次 Version/Scale	比例 Scale	修改标记 Change Mark							
			A/01									
料号 Part No.	LS-MT-01-07A					图号 DWG. NO.	LS-86CM4.5					
			共 1 套 Total 1 set		第 1 套 Set 1 of 1							