



Dimension: (Unit: mm)

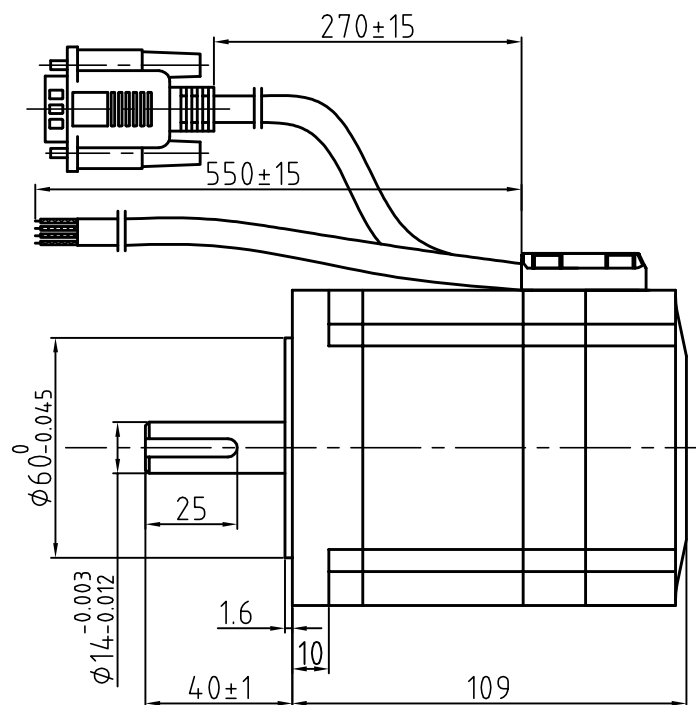

M5 Depth 10

4-φ6.5

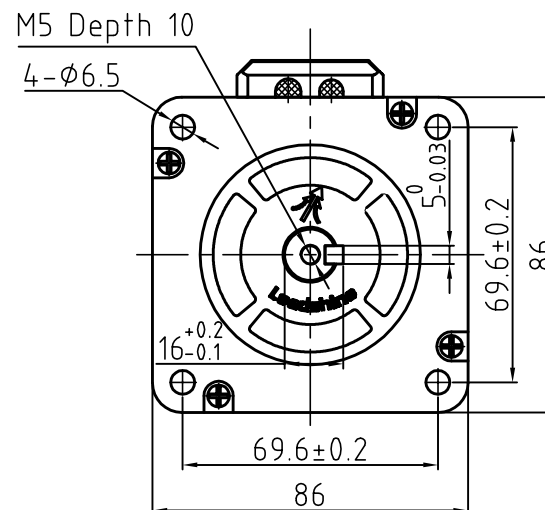

Common Rating

Step angle	1.8°
Position accuracy	1.8±0.09°
Dielectric strength	1000VAC 1min
Insulation resistance	100MΩm(500VDC)
Insulation class	B
Temp rise(Max)	80K
Radial play	Max.0.02mm(Load 450g)
Axial play	Max.0.08mm(Load 900g)

Specification

Current/phase	6.0 A
Voltage	2.8 V
DC Resistance/phase ±10%	0.6 Ω
Inductance/phase ±20%	3.97 mH
Holding torque	4.6 N·M
Inertia	1.95 kg·cm²
Weight	2.7 kg
Encoder Resolution	1000 cpr

版本 Rev.	日期 Date	变更文件号 ECN NO.	变更内容 Revisions	设计 By
V1.0	17.05.18		带LOGO, 新外观	王洪松

Motor Connections

A+ 黑 Black


A- 红 Red



B+ 黄 Yellow B- 蓝 Blue



Encoder Signals



	1	2	3	11	12	13
颜色	黑	红	白	黄	绿	蓝
定义	A+	VCC	GND	B+	B-	A-

设计 Designed	杨陶	日期 Date	2017.05.18	材料 Material			深圳市雷赛智能控制股份有限公司 SHENZHEN LEADSHINE TECHNOLOGY CO., LTD.		
审核 Checked	王洪松		2017.05.18	第一角画法 First Angle projection		 		名称 Title	混合伺服电机
批准 Approved	黄捷建		2017.05.18	版本/版次 A/01	比例 Scale	阶段标记 Stage Mark			86CME45 MS30
料号 Part No.	LS-MT-01-07A			共 1 套 第 1 套 Sheet 1 of 1			图号 DWG. NO.		
							LS-86CME45 MS30		