

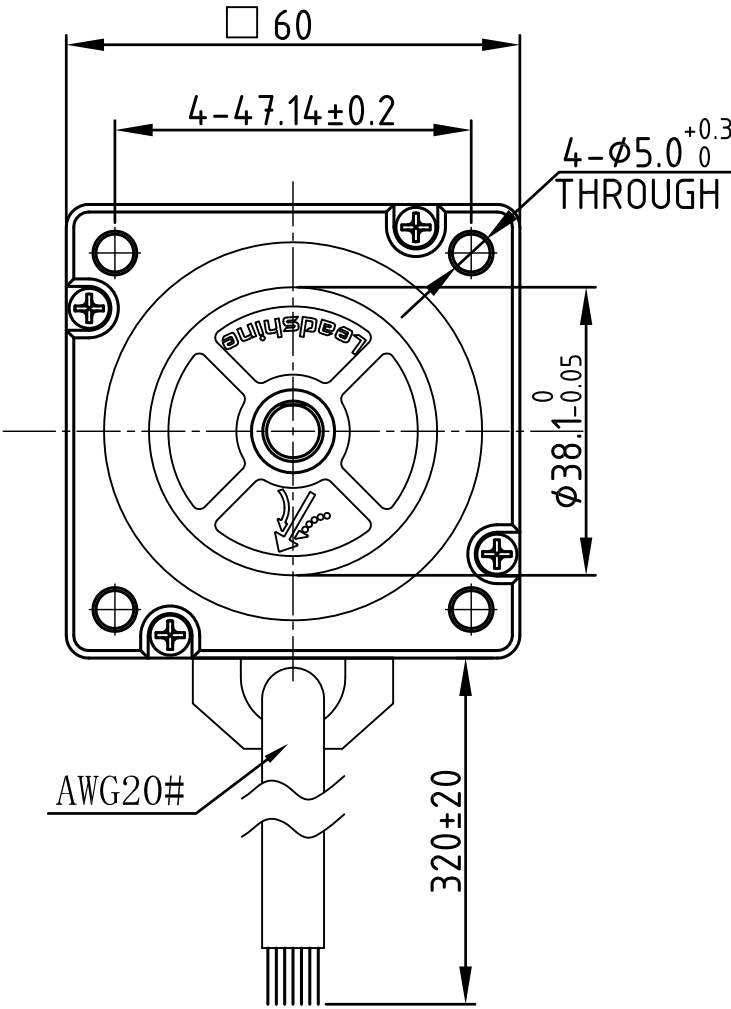


RoHS

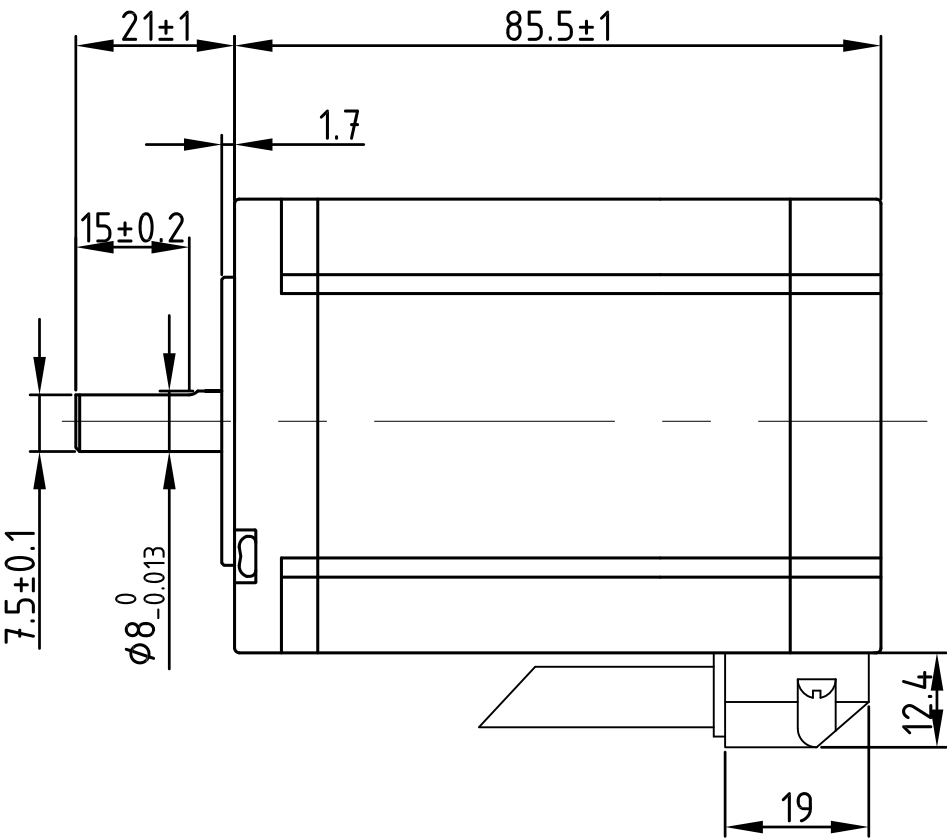

Dimension: (Unit: mm)

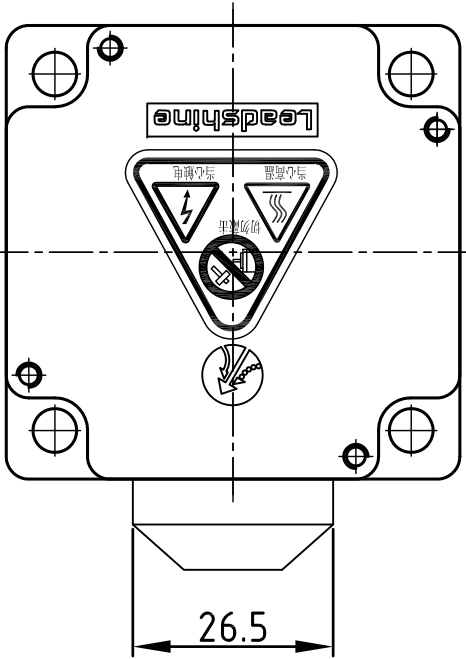


Common Rating

Step angle	1.8°
Position accuracy	1.8±0.09°
Dielectric strength	500VAC 1min
Insulation resistance	100M0hm(500VDC)
Insulation class	B
Temp rise(Max)	80K
Radial play	Max.0.02mm(Load 450g)
Axial play	Max.0.08mm(Load 900g)

Specification:

Current/phase	5.0 A
Voltage	3.0 V
DC Resistance/phase ±10%	0.6 Ω
Inductance/phase ±20%	2.4 mH
Holding torque	3.0 N•M
Inertia	0.69 kg•cm ²
Weight	1.3 kg

Motor Connctions:

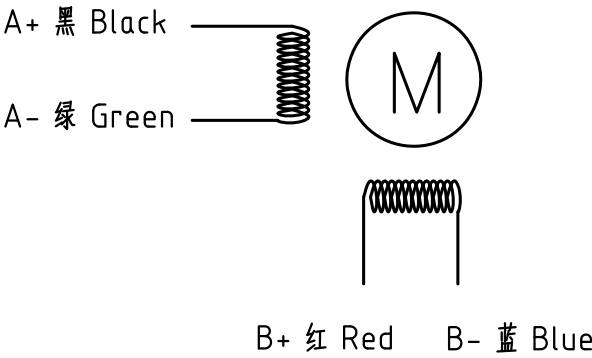

技术要求:

- 1、未注形位公差按GB/T 1184-K;
 - 2、未注尺寸公差按GB/T 1804-m。
- (除非另外指定)

设计 Designed		标准化 Standardized		材料(Material):	名称(Title)	步进电机
制图 Drawn					型号(Model)	D57CM31 MS21
校对 Proofread		审核 Checked		重量(Weight)/g:	图号(DWG No.)	LS-D57CM31 MS21
工艺 Processed		批准 Approved		阶段标记(Stage Mark)	料号(Part No.)	
表单编号 Form No.	LS-QP-46-09A	版本/版次 Edition/Serial NO.	A/01	共1页第1页 Page 1 of 1	比例(Scale)	1:1

