


版本 Rev.	日期 Date	变更文件号 ECU NO.	变更内容 Revisions	设计 By
V1.0	19.05.08		按图57规定安装	王林林

Dimension: (Unit: mm)

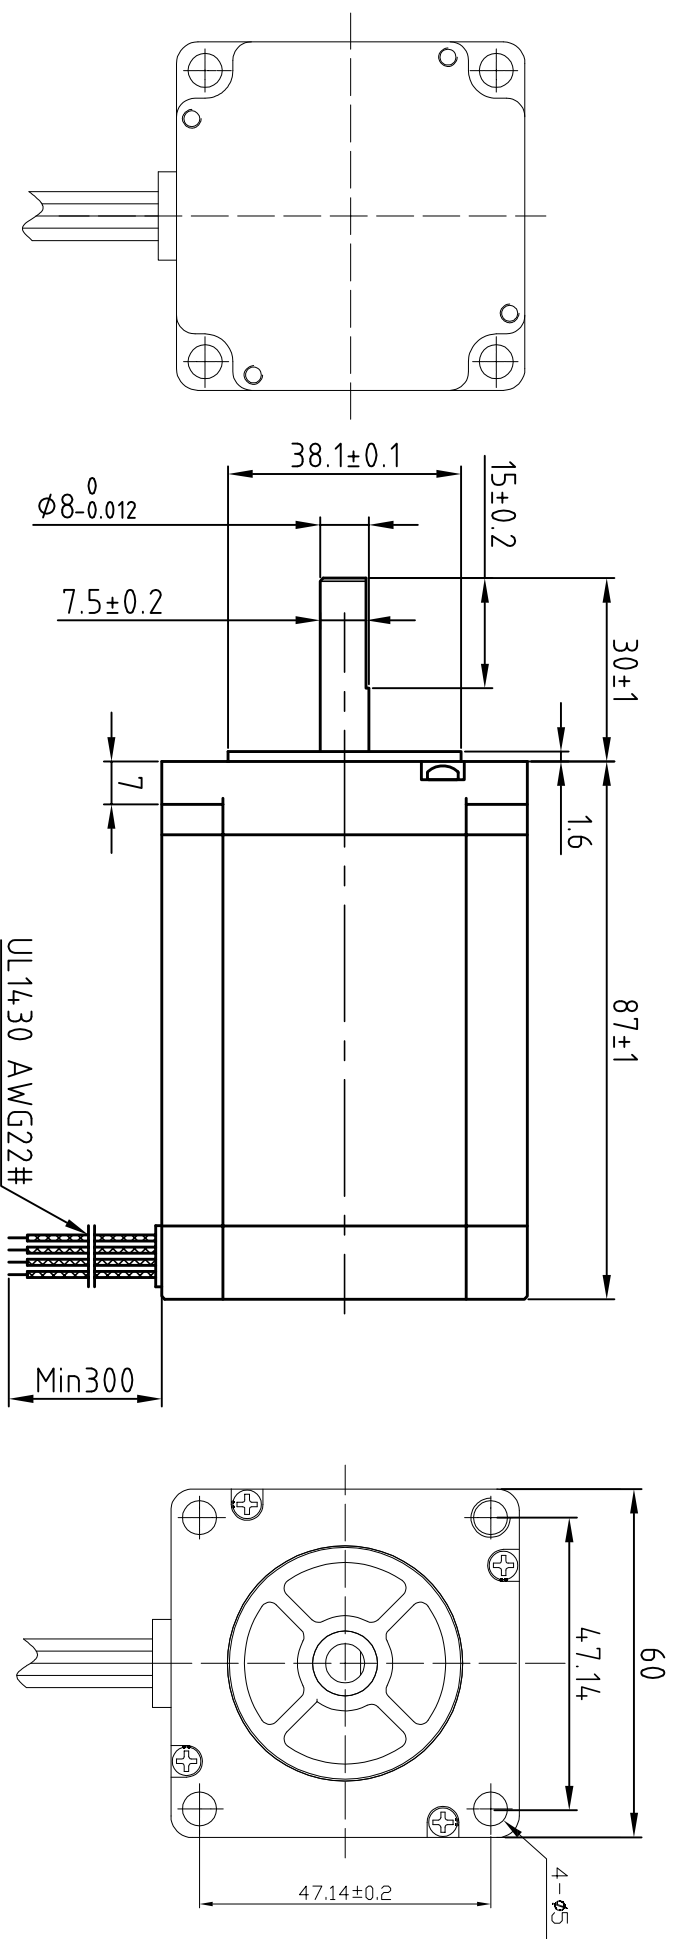

Common Rating

Step angle	1.8°
Position accuracy	1.8±0.09°
Dielectric strength	500VAC 1min
Insulation resistance	100MΩhm(500VDC)
Insulation class	B
Temp rise(Max)	80K
Radial play	Max.0.02mm(load 4.50g)
Axial play	Max.0.08mm(load 900g)

Specification:

Current/phase	5.0 A
Voltage	2.0 V
DC Resistance/phase $\pm 10\%$	0.55 Ω
Inductance/phase $\pm 20\%$	2.2 mH
Holding torque	3.1 N•M
Inertia	0.84 kg•cm ²
Weight	1.4kg

Motor Connections:

A+ 黑 Black

A- 聚 Green

B+ 红 Red B- 蓝 Blue

设计	王洪松	日期	2019.05.08			材料 Material	深圳市雷赛智能控制股份有限公司 SHENZHEN LEADSHINE TECHNOLOGY CO., LTD.
Designed		Date					
审核	黄捷建	2019.05.08	第一角画法 First Angle projection				混合式步进电机 Title
Checked			放大/缩小 Scale	图章标记 Stage Mark			
批准	黄捷建	2019.05.08	A/01				
Approved							
材料号 Part No.	共 1 套 第 1 套			Sheet 1 of 1		图号 DWG. NO.	LS-D57CM31X-0-S30