



版本 Rev.	日期 Date	更改文件号 ECN NO.	更改内容 Revisions	设计 By
V1.0	21.04.28		初版	王洪楠
7				

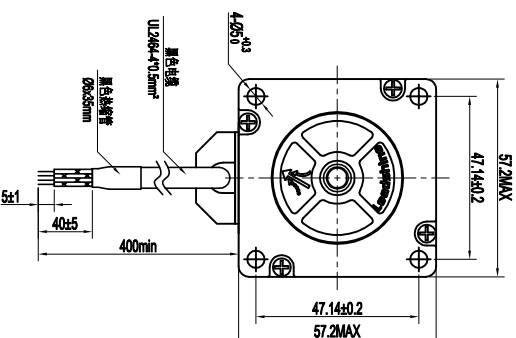

Step angle	1.8°
Position accuracy	18±0.09°
Dielectric strength	500VAC 1min
Insulation resistance	100MΩmin(500VDC)
Insulation class	B
Temp rise(Max)	80K
Radial play	Max.0.02mm(Load 4.50g)
Axial play	Max.0.08mm(Load 900g)

Current/phase	4.0 A
Voltage	1.68 V
DC Resistance/phase $\pm 10\%$	0.4, 2 Ω
Inductance/phase $\pm 20\%$	1.6 mH
Holding torque	1.3 N • M
Detent torque	0.04 N • M
Inertia	0.3 kg • cm ²
Weight	0.72 kg

设计	57CM13	日期	2021.04.28	材料	深圳市雷赛智能控制股份有限公司 SHENZHEN LEADSHINE TECHNOLOGY CO., LTD.			
Designed		Date		Material				
审核	黄桂建	2021.04.28		第一角画法 First Angle projection	混合式步进电机			
Checked								
批准	黄桂建	2021.04.28		版本/版次 Rev./Rev.	比例/Scale	图例标记/Note Mark	图号 DWG. NO.	
Approved				A/01			LS-57CM13-SZ MS30	
零件编号/ Part No.	LS-MT-01-07A	共 1 套/第 1 套 Sheet 1 of 1						