



标记Mark	次数No.	更改文件号File change No.	更改内容Content changed	签名Signature	日期Date

Dimension: (Unit: mm)

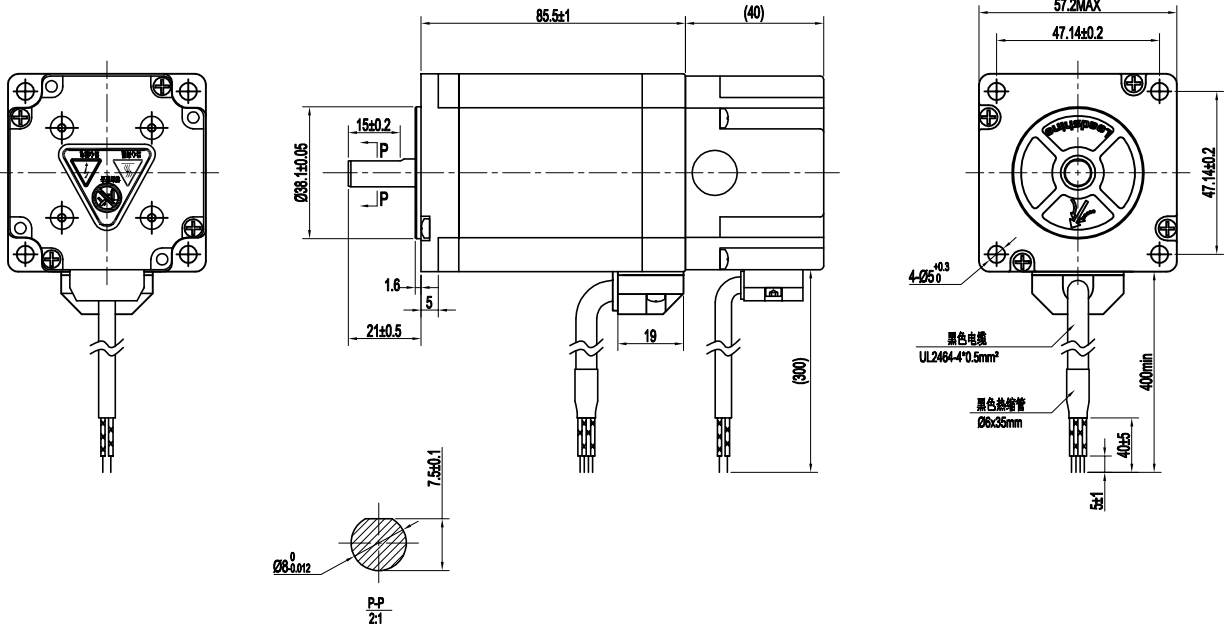

电机接线图



永磁式断电机参数	
接线图	红+ 黑-
电压	DC24V
制动力	2N.m

Common Rating

Step angle	1.8°
Position accuracy	1.8±0.09°
Dielectric strength	500VAC 1min
Insulation resistance	100MΩ(500VDC)
Insulation class	B
Temp rise(Max)	80K
Radial play	Max.0.02mm(Load 450g)
Axial play	Max.0.08mm(Load 900g)

Current/phase	5.0 A
Voltage	3.2 V
DC Resistance/phase ±0.1Ω	0.44 Ω
Inductance/phase ±20%	2.2 mH
Holding torque	2.6 N•M
Detent torque	0.080 N•M
Inertia	0.52 kg•cm ²
Weight	1.6 kg

技术要求:
1、未注形位公差按GB/T 1184-K;
2、未注尺寸公差按GB/T 1804-m。
(除非另外指定)

设计 Designed	杨陶	2021-11-27	标准化		材料(Material):	名称(Title)	开环步进电机
制图 Drawn	杨陶	2021-11-27				型号(Model)	57CM26-BZ MS30
校对 Proofread			审核 Checked	王洪松	2021-11-27	重量(Weight)/g:	图号(DWG No.)
工艺 Processed			批准 Approved	袁建建	2021-11-27	阶段标记(Stage Mark)	料号(Part No.)
表单编号 Form No.	LS-MT-01-07B			版本/版次 Edition/Serial NO.	A/01	共1页第1页	比例(Scale)
						Page 1 of 1	1:1

